

 **Veridura™**
UPHOLSTERY

The Perfect Fusion of Comfort,
Durability, and Sustainability



Phthalate-Free



Fire Retardant



Oil Resistant



Alcohol Resistant



Ultra Soft



Stain Resistant



Anti Bacterial



Eco - Friendly




Veridura™ UPHOLSTERY




The Perfect Fusion of Comfort, Durability, and Sustainability

Discover a new standard in eco-friendly luxury with Veridura™ Upholstery. Crafted for those who demand both high performance and environmental responsibility, this innovative material is free from plasticizers and phthalates, offering a soft, smooth touch without compromising on durability.


Engineered to meet the rigorous demands of healthcare environments, Veridura™ Upholstery is fire-retardant, UV-resistant, and oil-resistant, making it an ideal choice for medical furniture, including examination tables, treatment chairs, and clinical workstations. With 20-year hydrolysis resistance and exceptional abrasion resistance, it is built to deliver long-lasting comfort, hygiene, and resilience—day after day in demanding medical settings.

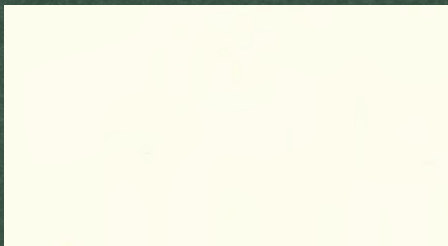


CREAM

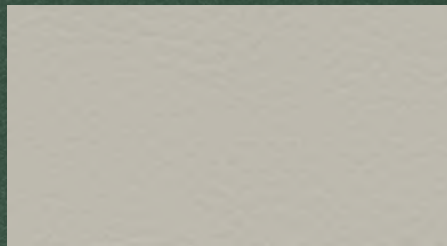


BEIGE

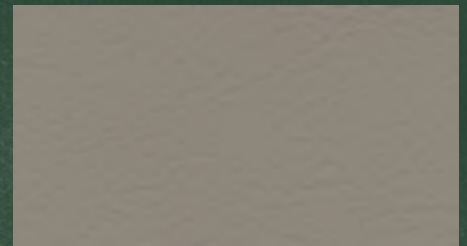

MOUSE GREY

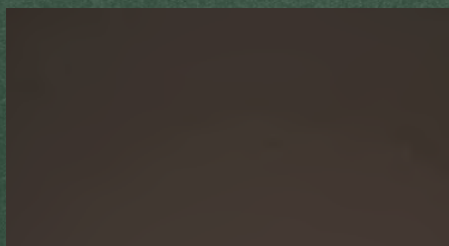

BROWN

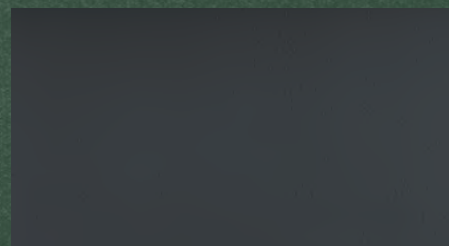

CHARCOAL GREY

CLEANING INSTRUCTIONS

Warm water and natural soap. Dry with microfiber or any soft cloth. Do not use solvents, chloride, abrasives, chemical cleaning agents, stain remover and any oily detergents. Please note that colorings by jeans or other textiles are excluded from any manufacturer's guarantee as well as tears, cuts and improper uses.

TECHNICAL SHEET

NAME OF TEST	CLAUSE NO / TESTMETHOD	UNIT	SPECIFIED REQUIREMENT	TEST VALUE OBTAINED	CONFORMITY
Thickness	ISO 2286-3	mm	0.95 ± 0.10	1.00	✓
Total Weight	ISO 2286-2	G / Sq.Mt.	700 ± 5%	726.7	✓
Tensile Strength	ISO 1421	N / 5cm	Wrap - 400 Min.	869.22	✓
			Weft - 200 Min.	573.84	✓
Elongation at Break	ISO 1421	%	Wrap - 40 Min.	65.77	✓
			Weft - 120 Min.	155.21	✓
Tear Strength / Single Tear	ISO 4674-1 Method B	N	Wrap - 25 Min.	58.73	✓
			Weft - 25 Min.	46.50	✓
Adhesion Strength	ISO 2411	N / 5cm	Wrap - 25 Min.	38.17	✓
			Weft - 25 Min.	32.96	✓
Martindale Abrasion	ISO 5470-2	Cycles	Dry - 200000 Cycles Min.	No development of holes observed.	✓
			Wet - 200000 Cycles Min.	No development of holes observed.	✓
FLAMMABILITY					
CAL TB 117	CAL TB 117	--	✓		✓
RESISTANCE TO					
High Temp. Resistance 100°C, 72h	ISO 188	--	No Defects	No Delamination, Blistering	✓
Low Temp. Resistance -40°C, 24h	ISO 812	--	No Defects	No Defects	✓
Acetone	UNI EN ISO 105 E02: 2013	--	✓	Grey Scale Rating - 4	✓
Sea Water	UNI EN ISO 105 E02: 2013	--	✓	Grey Scale Rating - 4	✓
Bleach (3% NaOCl)	UNI EN ISO 105 E02: 2013	--	✓	Grey Scale Rating - 4	✓
Alcohol	UNI EN ISO 105 E02: 2013	--	✓	Grey Scale Rating - 4	✓
Urine (1.2 gm / lit)	UNI EN ISO 105 E02: 2013	--	✓	Grey Scale Rating - 4	✓
Oil Resistance	ISO 14419	--	✓	Grade - 6	✓
ACCELERATING DEGRADATION / HYDROLYSIS RESISTANCE					
Tropical & Jungle Test	UNI EN ISO 1419 / C-1995 E	--	✓	No crack or damage observed.	✓